


PERFORMANS

Model	Kanal ø	m ³ /h	l/s	Pa	W	dB(A)*
Flux 100	100	90	25	124	30	44
Flux 250	100	201	56	195	29	52
Flux 250	120	232	64	195	29	52



*Lp(A) 3 metre mesafeden, 230V-50Hz.

ÖLÇÜLER

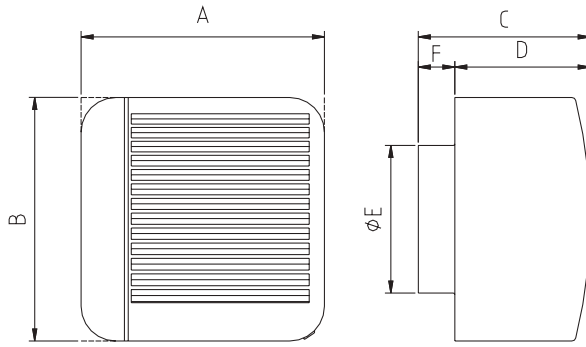

Model	A	B	C	D	ØE	F	kg
Flux 100	160	160	119	89	97	30	0,8
Flux 250 Ø100	210	210	156	131	97	25	1,8
Flux 250 Ø120	210	210	156	131	119	28	1,8

EĞRİLER

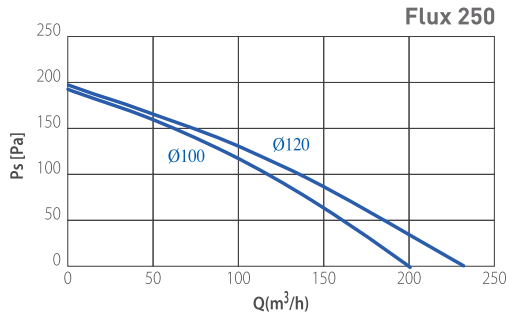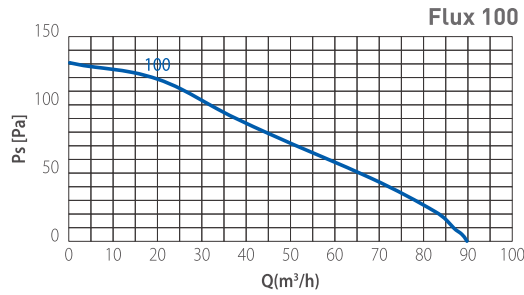

EU 1253/2014 yönetmeliği ve ERP 2009/125/CE direktifine uygundur.

- Merkez çıkışlı radyal kanal fanı
- Klapeli

UYGULAMA

